

INFLUENCING (NANO)PARTICLE EMISSIONS OF 2-STROKE SCOOTERS

J. Czerwinski, P. Comte

University of Applied Sciences, Biel-Bienne, Switzerland

F. Reutimann

BUWAL, Switzerland

A. Mayer

TTM, Switzerland

Abstract

Limited and nonlimited emissions of scooters were analysed during several annual research programs of the Swiss Agency of Environment Forests and Landscape (SAEFL, BUWAL)).*

*Small scooters, which are very much used in the congested centres of several cities are a remarkable source of air pollution. Therefore every effort to reduce the emissions is an important contribution to improve the air quality in urban centres. In the present work detailed investigations of particle emissions of different 2-stroke scooters with direct injection and with carburettor were performed. The nanoparticulate emissions with different lube oils and fuels were measured by means of SMPS, (CPC) and NanoMet *). Also the particle mass emission (PM) was measured with the same method as for Diesel engines. It can be stated, that the oil and fuel quality have a considerable influence on the particle emissions, which are mainly oil condensates. The engine technology influences the (nano)particle emissions by: mixture preparation, mixture tuning, oil consumption, postoxidation, quality, condition and temperature of the catalyst. Since the particulate emission of the 2-S consists mainly of lube oil condensates the minimization of oil consumption stays always an important goal.*

1. Introduction and objectives

In the annual investigation programs of AFHB mandated by the Swiss EPA (BUWAL) [1, 2, 3, 4]**) the problem of particle mass and particle counts emissions of 2-S engines was particularly addressed. The work about influences of different lubricating oils, different fuels and different conditions of oxidation catalyst 2003, [5], showed in reality considerable potentials, but also necessities of further more extended, interdisciplinary research.

This situation led to the need of participation of several analytical laboratories and industrial partners and due to general interest and support a project network was created. In this network the Swiss Research Partners: TTM, AFHB, EMPA, ME, SUVA collaborate with several industrial partners and foreign research institutes, like JRC Ispra, VTT Finland, Toxicity Network France and ARAI India. This network is open to the interested parties to join it and it exchanges information about the 2-S 2-wheelers research with the Annex XXXIII of IEA Implementing Agreement AMF, [6].

This paper represents the supplementing investigations and validations of the results from [5] and [7], which showed the influences of lube oils and fuels on the (nano) particulates.

The specific questions where:

- reproducibility of the influences of oils with different S-content,
- influences of different oils with the Aspen fuel,
- influences of engine technology TSDI-Carburettor,
- check of sampling point and sampling procedure for nanoparticles.

*) Abbreviations see at the end of paper

**) References see at the end of paper


2. Investigated Scooters

The investigated scooters were:
Peugeot Looxor TSDI and Peugeot Looxor Carburettor (see [Table 1](#))

Table 1. Data of the scooter Peugeot Loco TSDI and Carburettor

	Peugeot	Peugeot
vehicle identification	Looxor TSDI	Looxor
model year	2002	2004
transmission no. of gears	variomat	variomat
km at beginning	1400	0
engine:		
type	2 stroke	2 stroke
displacement cm ³	49.1	49.1
number of cylinders	1	1
cooling	Air forced	Air forced
rated power kW	3.6	3.72
rated speed rpm	7800	8100
idling speed rpm	1700	1800
max vehicle speed km/h	45	45
weight empty kg	94	94
mixture preparation	direct injection with automatic oil pump	carburettor with automatic oil pump
catalyst	yes	yes + SAS (secondary air system)
catalyst data	Pt/Rh 5/1 50 g/ft ³ 200 cpsi metal support Ø 60.5 / L 40	Pt/Pd/Rh 1/28/1 50 g/ft ³ 100 cpsi metal support Ø 60.5 / L 40

Fig. 1 shows these scooters in the measuring laboratory.

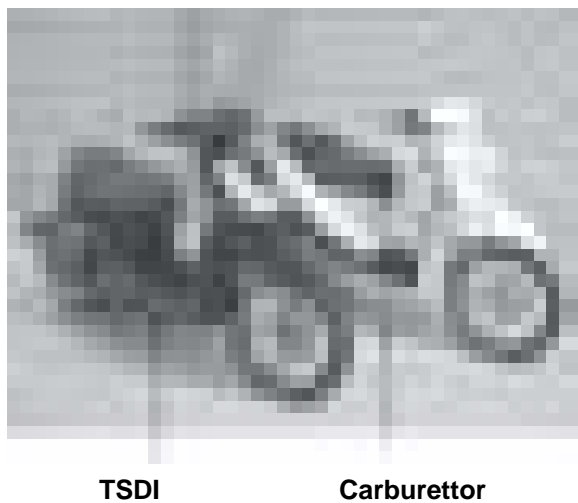

The Peugeot TSDI-System uses crankshaft driven air compressor. Gasoline is injected in the pressurised air of the feed rail where the premixing of air and fuel takes place. The air injector controls the admission of the rich mixture in the combustion chamber. The lubrication oil is dosed in the intake air of the engine by means of the oil pump.

For the vehicles with carburettor simple, conventional carburettors with a cable-controlled throttle body and needle are used. The lubrication oil is also dosed in the intake air of the engine.

Fig. 1. Investigated scooters: left TSDI, right Carburettor

3. Particle size analysis and measuring set-up

In addition to the gravimetric measurement of particulate mass, the particle size and counts distributions were analysed with following apparatus:

- SMPS – Scanning Mobility Particle Sizer, TSI (DMA TSI 3071, CPC TSI 3025 A)
- NanoMet – System consisting of:
 - PAS – Photoelectric Aerosol Sensor (Eco Chem PAS 2000)
 - DC – Diffusion Charging Sensor (Matter Eng. LQ1-DC)
 - MD19 tunable minidiluter (Matter Eng. MD19-2E, see Fig. 1).

- Thermoconditioner (TC) (i.e. MD19 + post dilution sample heating until 300°C)
- Thermodesorber (TD)

A detailed description of those systems can be found in the manufacturers information. The sampling and measuring set-up during the tests shows Fig. 2.

In the research of sampling for NP-analysis several variants of sampling were used, which are alternatively represented in Fig. 2.

The nanoparticulates measurements were performed during cold acceleration to a constant speed and a following warm-up period with CPC and NanoMet and at the constant speed (warm) with SMPS and NanoMet.

4. Measuring procedures and oils

The sampling for nanoparticle analysis took place at tailpipe through MD19, as in the previous work, [5, 7]. The gravimetric measurements of PM were performed at the CVS tunnel (with same method as for Diesel cars).

Also the measuring procedure was similar, as in [5]: cold start (20-25°C) – acceleration to 40 km/h and $v = \text{const} = 40 \text{ km/h}$. It was decided to increase the speed (previously 30 km/h) to guarantee the catalyst light off with all researched combinations “vehicle-fuel-oil”.

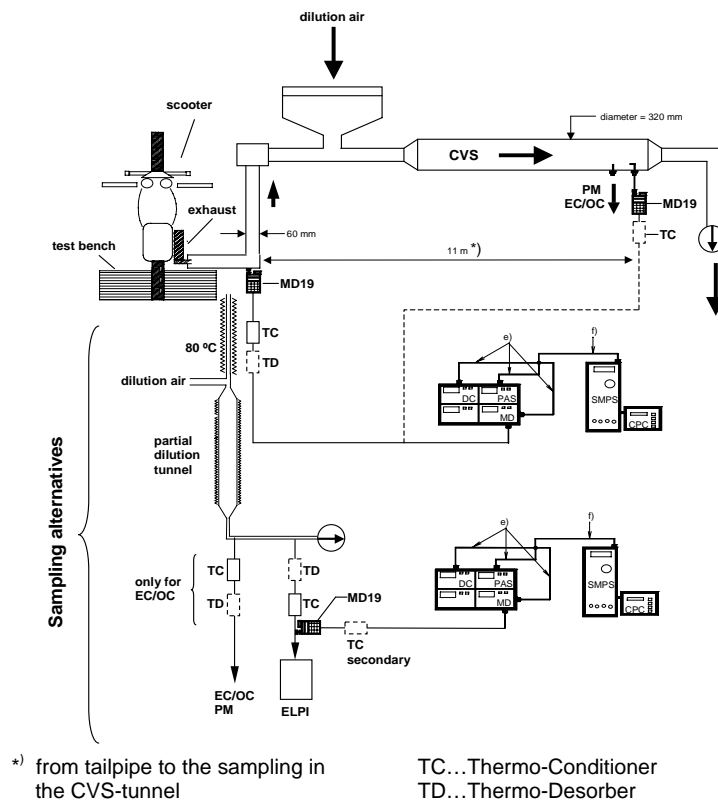


Fig. 2. Sampling and measuring set-up for nanoparticulates analysis of the scooters with different variants of sampling methods

The temperature and CO after catalyst were time-measured to see the light off. The stationary warm operation was prolonged until 20 min to get enough mass on the measuring filters for the analytics of PAH and SOF/INSOF.

After measurement of a given configuration there was a change of the configuration (oil, fuel, catalyst), a conditioning period of about 10 min and cooling down with blower during at least 30 min.

Table 2 shows all performed measuring series, which are called with “T” for TSDI and with “C” for Carburettor.

Table2. Measurements of scooter Peugeot TSDI and Carburettor with nanoparticle analysis; original catalyst and original oil dosage

name	lube oil-		fuel	Scooter
	type	sulfur		
T11 - T14	Panolin TS	S= 6250 ppm	unleaded	TSDI
T21 - T22	Panolin Synth	S=450 ppm		
T31	Nycolube	S=350 ppm		
T41 - T42	Panolin Synth Aqua	S= 0 ppm		
T51 - T54	Panolin TS	S= 6250 ppm	Aspen	
T61 - T62	Panolin Synth	S=450 ppm		
T71	Nycolube	S=350 ppm		
T81 - T82	Panolin Synth Aqua	S= 0 ppm		

C11 - C14	Panolin TS	S= 6250 ppm	unleaded	Carburetor
C21 - C22	Panolin Synth	S=450 ppm		
C31	Nycolube	S=350 ppm		
C41 - C42	Panolin Synth Aqua	S= 0 ppm		
C51 - C54	Panolin TS	S= 6250 ppm	Aspen	
C61 - C62	Panolin Synth	S=450 ppm		
C71	Nycolube	S=350 ppm		
C81 - C82	Panolin Synth Aqua	S= 0 ppm		

4.1. Used lube oils and fuels

The data of used lube oils with decreasing sulphur content are represented in Table 3. The oils: “Panolin TS & Nycolube” are semi-synthetic.

Two fuels were used during the measurements: standard market gas-line and an Aspen gasoline, which is almost aromats-free (aromats < 0.1 Vol %, benzol < 0.01 Vol %). The sulphur content of both gasolines was analysed and no sulphur was found.

5. Results

5.1. Thermoconditioning of sample for NP-analysis

Several variants of sampling, according to Fig. 2, were investigated and the results will be reported separately.

In the present paper the following examples of thermograms at tailpipe shall signalize, how the different engine technologies influence the composition and behaviour of the exhaust aerosol.

This part of research was performed at stationary warm operating condition of engine and catalyst and at maximum speed 45 km/h.

Table 3. Data of the used lube oils

		Panolin TS	Panolin 2-S Synth.	Panolin Synth. Aqua	Nycolube
Property	Unit				
Viscosity kin 40°C	mm ² /s	90	103	95	
Viscosity kin 100°C	mm ² /s	11.2	8.2	6.3	7.9
Density 15°C	kg/m ³	882	925	946	
Pourpoint	°C	-27	-40	-28	
Flamepoint	°C	> 150	> 150	> 150	
Total Base Number TBN	mg KOH/g	3	3	2.5	
Sulfur	ppm	6250	450	0	350
Fe	ppm	0	5	2	1
Mo	ppm	1	0	0	0
Mg	ppm	2	3	1	2
Zn	ppm	105	18	0	0
Ca	ppm	617	458	11	322
P	ppm	90	36	16	6

Fig. 3 shows the results with Peugeot TSDI, sampling at tailpipe with minidiluter (MD) and thermoconditioner (TC, ThC).

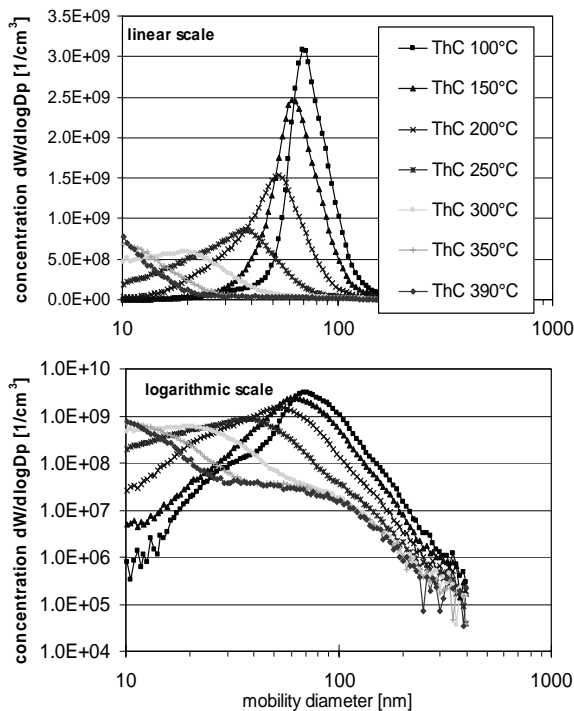


Fig. 3. SMPS size spectra with thermo-conditioning of sample

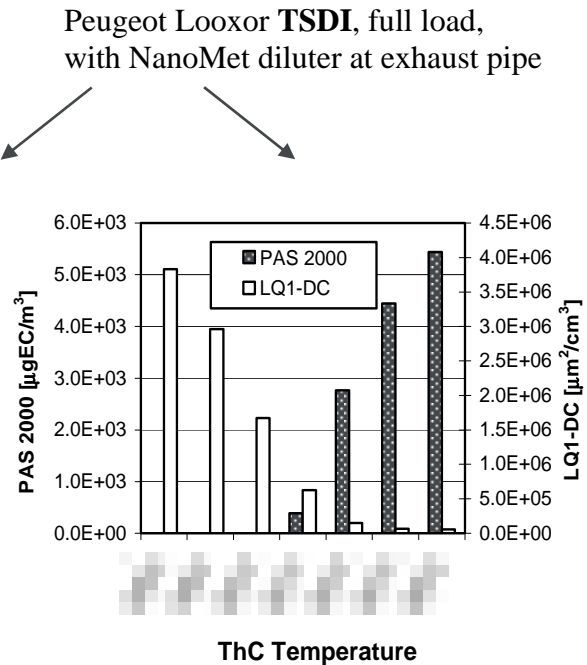


Fig. 4. NanoMet signals with thermo-conditioning of sample

Increased sample temperature in the TC provokes evaporation from the surface of particles and moves the SMPS PSD-spectrum to the lower peak-concentrations and smaller median diameters i.e. from the accumulation to the nuclei mode.

In the logarithmic scale a bimodality of the spectra with higher TC-temperatures is visible. This suggests that the particles in accumulation mode (60-90 nm), which remain at highest temperature are either very heavy compounds, or solids. These solids may have been formed already during combustion in the engine, similar to processes known from 4-stroke gasoline DI engines. The NanoMet signals, Fig. 4, confirm the tendency of increased solid particle ratio showing a decreasing amount of condensates (DC) and increasing amount of carbonaceous surface (PAS) with the higher sample temperature. PAS (photoelectric aerosol sensor) is sensitive to the surface of particulates and to the chemical properties of the surface. It indicates the solid particles. DC (diffusion charging sensor) measures the total particle surface independent of the chemical properties. It indicates the solids and the condensates.

The research of sampling at tailpipe with MD + TC for the Peugeot Carburetor is depicted in Fig. 5. With increasing of the TC-temperature the very high count concentrations in nuclei mode decrease and with application of stronger dilution (5x, 10 x, or 100x by mean of a second MD inline with the first one) it is possible to cut a part of this nuclei mode. This behavior of the aerosol from "Carb." is quite different form the one of TSDI (Fig. 3). The Carburettor-version has a much higher exhaust gas temperature, which enables the creation of sulphates. The exhaust gas temperature of the TSDI is below the range of intensified sulphate production (oxidation SO₂ to SO₃).

Due to the higher exhaust gas temperature and the applied SAS (secondary air system) in the Carb. -version the oxidation of HC in the oxidation catalyst is more intense and the composition of aerosol is different than for TSDI. The NanoMet data, Fig. 6. confirm this fact showing almost unchanged DC and no PAS with increasing temperature (compare Fig. 4 and Fig. 6).

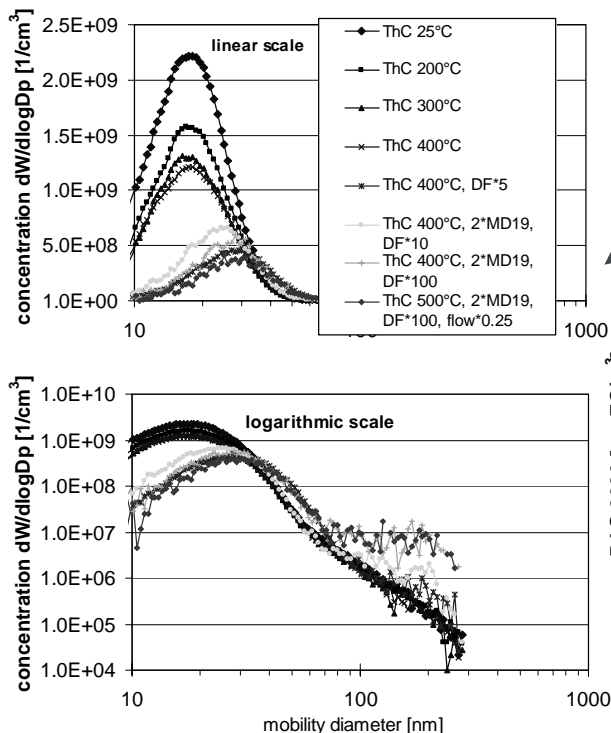


Fig. 5. MPS size spectra with thermo-conditioning of sample

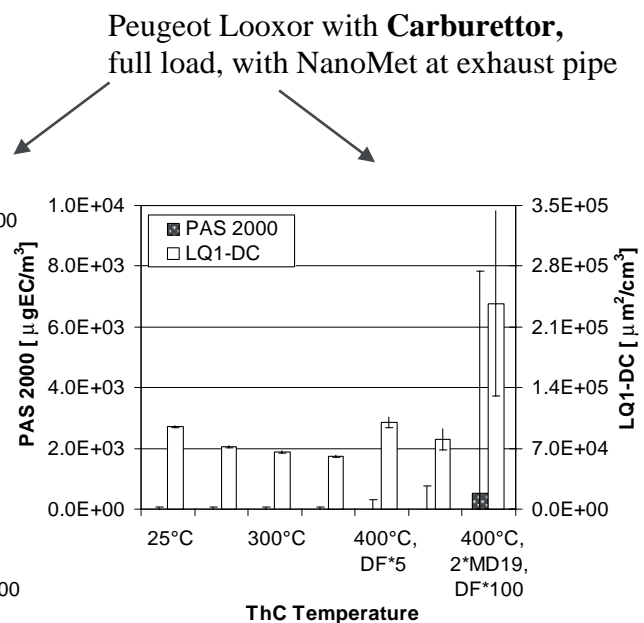


Fig. 6. NanoMet Signals with thermo-conditioning of sample

Generally it can be stated, that the sampling procedure: conditioning of the sample gas probe, dilution and sampling position have influence on the measured aerosol characteristics (PM, PSD, PAS, DC).

5.2. Different scooters, oils and fuels

The comparisons: gasoline - Aspen with NanoMet for both scooters, [Fig. 7](#) and [Fig. 8](#), show a quicker light off of the catalyst and a lower total particle surface (DC) at cold start with Aspen.

Note that the light off for Carb. -scooter starts already below 100 °C and t_{exh} reaches 380 °C, while for TSDI the light off takes place at temperatures above 160 °C and t_{exh} reaches 260 °C, (t_{exh} measured approx. 40 cm after catalyst).

Due to these differences the NanoMet signals show quite different behaviour at warm operation, p. ex. after 10 min:

For TSDI, which has: lower t_{exh} , leaner tuning of the mixture and less postoxidation in the oxicat, the DC-signal indicates the presence of condensates and no solids are visible (PAS=zero), because if there are any of them, they are enveloped with the condensates.

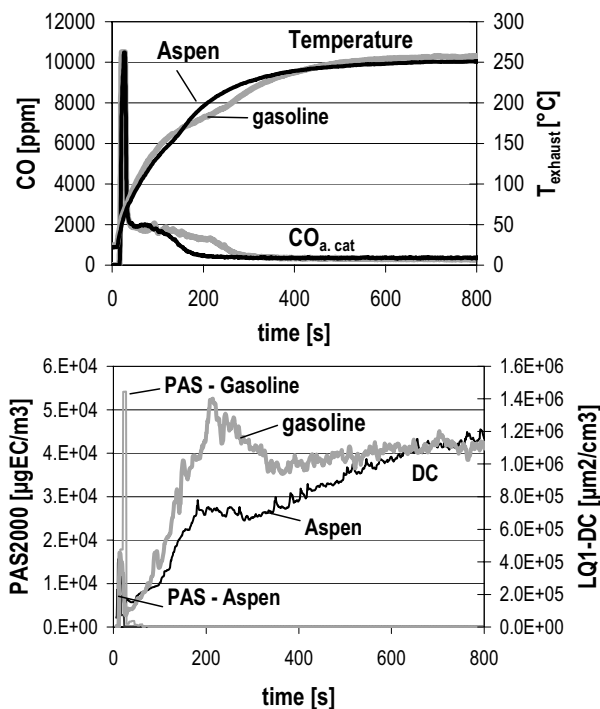


Fig. 7. Cold start - acceleration - 40 km/h with: Gasoline - Aspen, Peugeot TSDI Carb., oil: Panolin TS

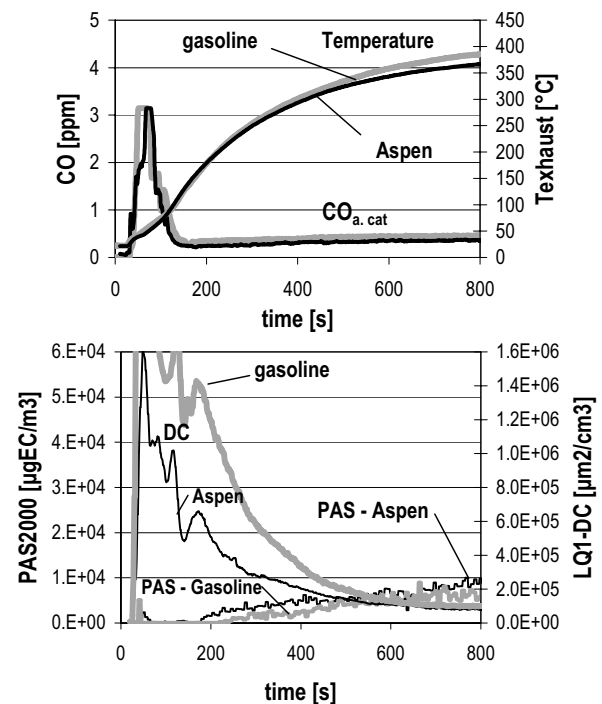


Fig. 8. Cold start - acceleration - 40 km/h with: Gasoline-Aspen, Peugeot Carb., oil: Panolin TS

For Carburettor, which has: higher t_{exh} , richer tuning of the mixture and a very intense postoxidation in the catalyst, the solids appear (PAS increase) after the light off and during the warm-up of the catalyst. Simultaneously the condensates (DC) decrease very much because of the oxidation of VOC and because of deposition on the bigger solid particles. The solids originate from the rich combustion, but they can be also products of the strong postoxidation. Following figures represent the influences of different oils on the particle emission metrics for both scooters and both fuels.

For TSDI and gasoline the tendency is similar as in the previous research, [7], [Fig. 9](#) – the oil with 0 ppm S has the highest PM- and DC-emission. The integrated SMPS particle numbers don't show this difference because of other PSD-shape for this oil T4.

For Carburettor there are generally much lower values of all represented emission parameters. This is due to the intense postoxidation with SAS and high t_{exh} . With gasoline,

[Fig. 10](#), the bimodality of SMPS spectra caused by the sulphates is visible. The oil C4 with 0 ppm S has quite other nuclei mode, caused by other substances (ev. components of

additive package). Given that DC is also maximal with this oil, the presence of organic condensates must be assumed. Regarding influence of Aspen, Fig. 11, can be remarked, that oil C8 (0 ppm S) moves the nuclei mode to lower sizes and lower amplitude – this is the result of co influence of the HC from fuel and HC from oil during the processes of combustion and postoxidation. With the same reasons the changes for other oils (C6 and C7) can be explained, of course with addition of sulphates (S ≠ 0).

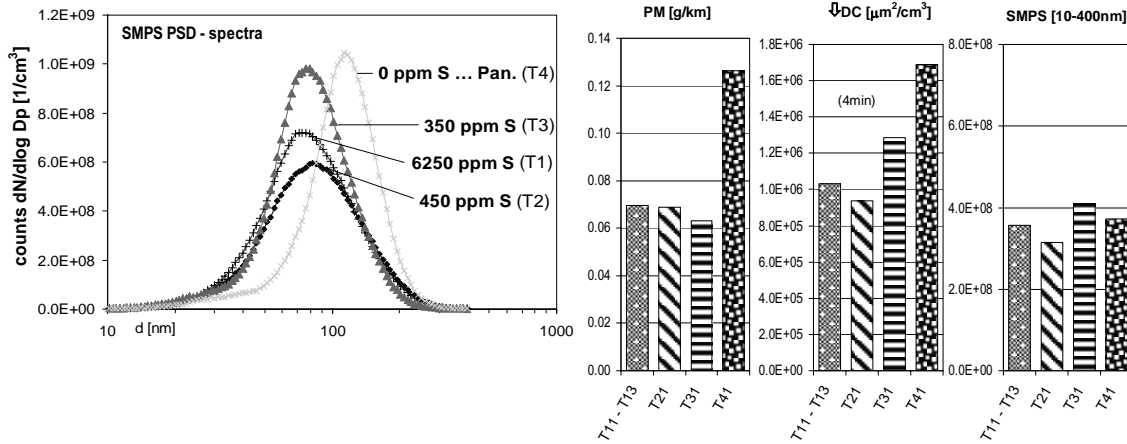


Fig. 9. Particle mass and nanoparticles at 40 km/h warm with gasoline and different lube oils, Peugeot Looxor TSDI

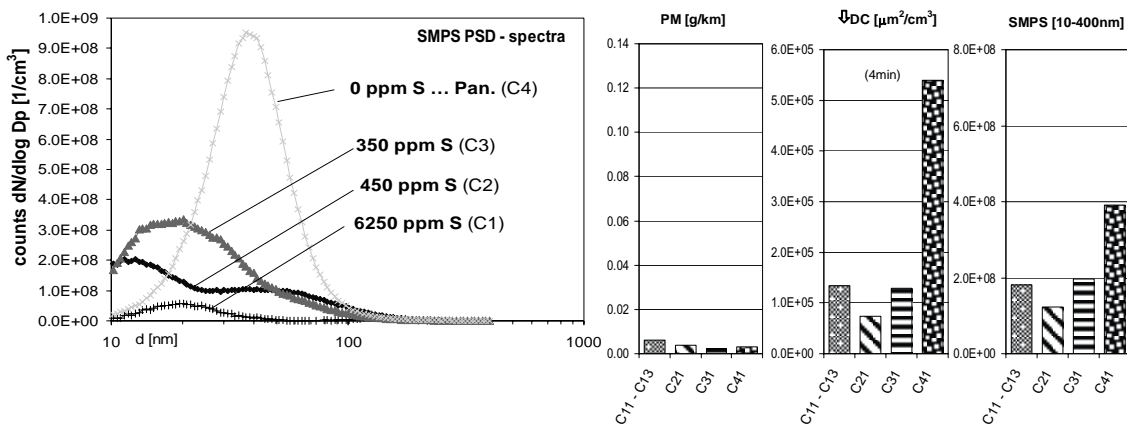


Fig. 10. Particle mass and nanoparticles at 40 km/h warm with gasoline and different lube oils, Peugeot Looxor Carb

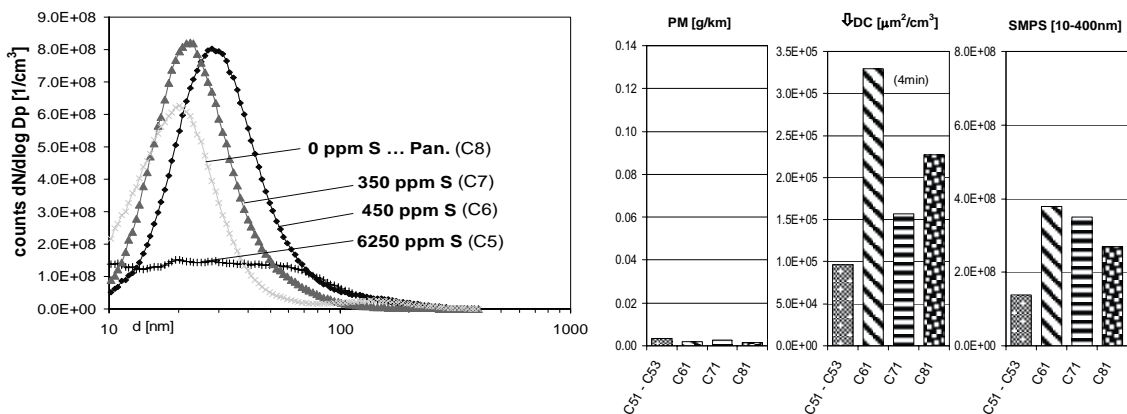


Fig. 11. Particle mass and nanoparticles at 40 km/h warm with Aspen and different lube oils, Peugeot Looxor Carb

6. Conclusions

Following conclusions can be pointed out:

- the composition of emitted aerosol depends on engine technology (DI-Carb.), exhaust gas aftertreatment (texh, SAS) and the used oil and fuel. The differences of the aerosol are visible by thermoconditioning of the sample,
- the influences of lube oils on the particle emissions from previous works could be confirmed on the scooter with DI and gasoline and they are slightly modified on the Carb. scooter,
- changing the fuel quality (Aspen) may increase the condensates with one oil and lower the condensates with another oil,
- due to an intense oxidation in the exhaust of the Carb. scooter the particle mass emission PM is very little and it is almost independent on lube oil quality,
- due to a high exhaust temperature of the Carb. scooter there are sulphates as condensates in the nuclei mode of the PSD-spectra,
- there is a clear evidence of co influences of oil & fuel on the spontaneous condensation and on the particle emission parameters,
- the sampling procedure: conditioning of the sample gas probe, dilution and sampling position have influence on the measured aerosol characteristics (PM, PSD, PAS, DC).

7. Acknowledgement

The authors would like to express their gratitude for the support and realisation of the project to:

- BUWAL (Swiss EPA, SAEFL), Mrs. M. Delisle; Mr. D. Zürcher
- Erdöl-Vereinigung, CH, Mr. A. Heitzer

For the help with the test material and the information thanks to:

- Peugeot Motorcycles France, Mr. M. Bonnin, Mr. G. Althoffer
- Piaggio, Italy, Mr. D. Cundari
- Engelhard Srl, Italy, Mr. P. Landri, Mrs. N. Violetti
- BUCK-TSP, Germany, Mr. A. Buck

For information and contribution of lube oils thanks to:

- PANOLIN AG, CH, Mr. P. Lämmle, Mr. R. Fanelli
- Bucher AG Motorex, CH, Mr. O. Sedello
- Lubrizol Ltd., GB, Mrs. M-C. Soobramanien

For support of the nanoparticle analytics to:

- Matter Engineering AG, CH, Mr. M. Kasper, Mr. Th. Mosimann
- EU-JRC Laboratories, Mr. B. Larsen, Mr. G. Martini
- EMPA Analytical Laboratories, CH, Mr. P. Mattrel, Mr. M. Mohr
- SUVA Analytical Laboratory, CH, Mr. R. Wolf, Mrs. S. Dellenbach

8. References

- [1] Czerwinski J., Comte P., Napoli S., Wili Ph., Summer Cold Start and Nanoparticulates of Small Scooters. Report B086 for BUWAL (SAEFL) Bern, Lab. For Exhaust Gas Control, Univ. of Appl. Sciences, Biel-Bienne, Switzerland, Nov. 2000. SAE Techn. Paper 2002-01-1096.
- [2] Czerwinski J., Comte P., Wili Ph., Summer Cold Start, Limited Emissions and Nanoparticles of 4-stroke Motorcycles. Final report 2001 for BUWAL, Lab. for Exhaust Gas Control, Univ. of Appl. Sciences, Biel-Bienne, Switzerland, B098, Nov. 2001. SAE Techn. Paper 2003-32-0025.

- [3] Czerwinski J., Comte P., Wili Ph., Summer Cold Start & emissions of different 2-wheelers. Final report 2002 for BUWAL, Lab. For Exhaust Gas Control, Univ. of Appl. Sciences, Biel-Bienne, Switzerland, B116, Nov. 2002.
- [4] Czerwinski J., Comte P., Limited Emissions and Nanoparticles of a Scooter with 2-stroke Direct Injection (TSDI). SAE Techn. Paper 2003-01-2314. 2003.
- [5] Czerwinski J., Comte P., Wili Ph., Emission Factors & Influences on Particle Emissions of Modern 2-Stroke Scooters. Report B139 for BUWAL (SAEFL) Bern, Lab. for Exh. Gas Control Univ. of Appl. Sciences, Biel-Bienne, Switzerland, Oct. 2003.
- [6] IEA, International Energy Agency – Implementing Agreement AMF, Advanced Motor Fuels – Annex XXXIII, see: www.iea-amf.vtt.fi.
- [7] Czerwinski J., Comte P., Reutimann F., Nanoparticle Emissions of a DI 2-Stroke Scooter with varying Oil- and Fuel Quality. SAE Techn. Paper 2005-01-1101, 2005.

8. Abbreviations

AFHB	Abgasprüfstelle der Fachhochschule, Biel CH (Lab. For Exhaust Gas Control, Univ. of Appl. Sciences, Biel-Bienne, Switzerland)
AMF	Implementing Agreement on Advanced Motor Fuels
ARAI	Automotive Research Association of India
BUWAL	Bundesamt für Umwelt, Wald und Landschaft (Swiss EPA, SAEFL)
Carb. (C)	Carburettor
CPC	condensation particle counter
CVS	constant volume sampling
Cx	measuring serie „X“ with Carburettor
DC	diffusion charging sensor
DMA	differential mobility analyzer
EMPA	Swiss Federal Laboratories for Materials Testing and Research
EPA	Environmental Protection Agency
ETHZ	Eidgenössische Technische Hochschule Zürich
EV	Erdöl-Vereinigung, Swiss Association of Oil Manufacturers
IEA	International Energy Agency
JRC	Joint Research Center, EU Laboratories, Ispra, Italy
MD	minidiluter
ME	Matter Engineering AG, CH
NanoMet	minidiluter + PAS + DC (+ ThC), (+TD)
NP	nanoparticulates
PAS	photoelectric aerosol sensor
PM	particulate matter, particulate mass
PSD	particles size distribution
SAEFL	Swiss Agency for Environment, Forests and Landscape (Swiss EPA, BUWAL)
SAS	secondary air system
SMPS	scanning mobility particles sizer
SOF	soluble organic fractions
SUVA	Schweizerische Unfallversicherungsanstalt
TD	thermodesorber
ThC (TC)	thermoconditioner
TSDI (T)	Two Stroke Direct Injection
Tx	measuring serie “x” with TSDI
TTM	Technik Termische Maschinen, CH
VOC	volatile organic compounds
VVT	Transport Research Center, Finland